

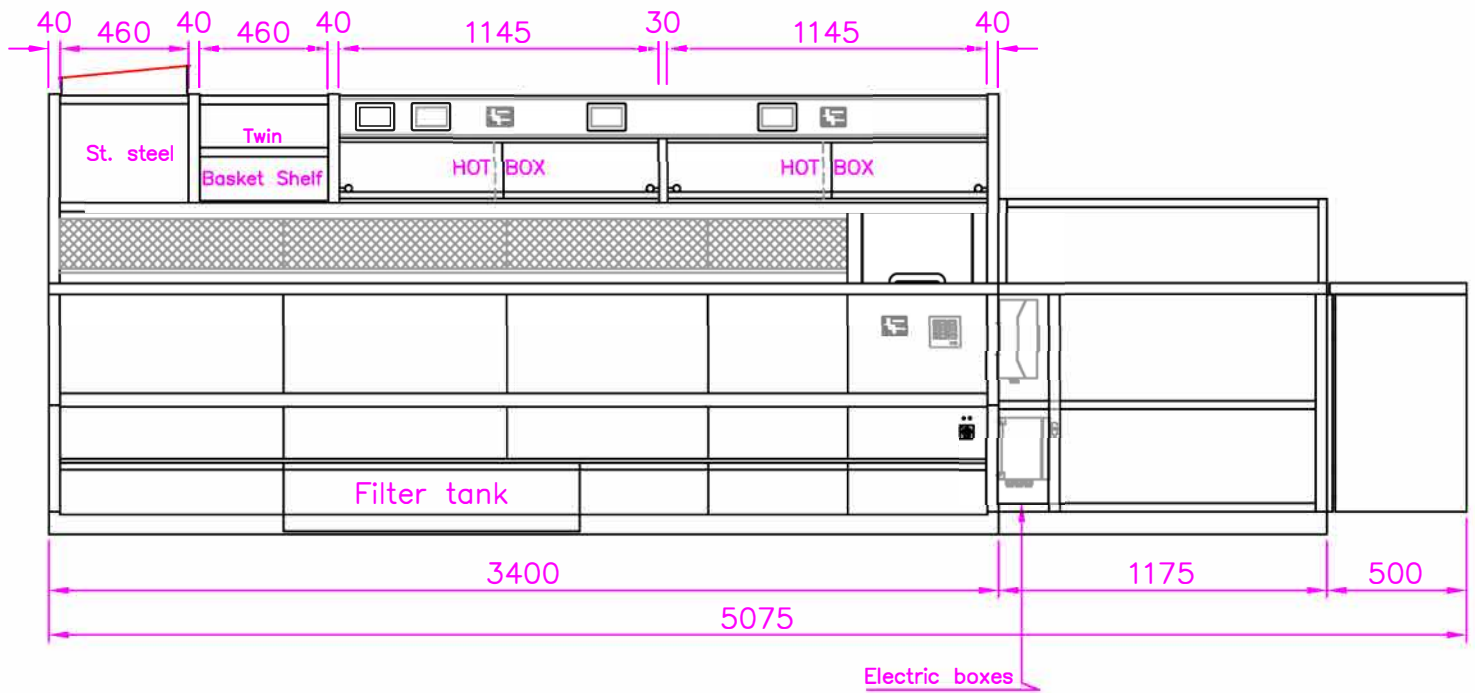


All products of Qbtec are provided with a grounding point.	
Electrical information of range:	
3 circuit breaker(s)	of 230 V
0 circuit breaker(s)	of 400 V 16A
0 circuit breaker(s)	of 400 V 32A
0 circuit breaker(s)	of 400 V 63A
0 separate cable(s) of 400 V	
Other specifications:	
Energy	: G20
Position electric boxes	: Right
Position gas connection	: —
Position extraction	: Through top
Position waste oil drain	: Fryer side

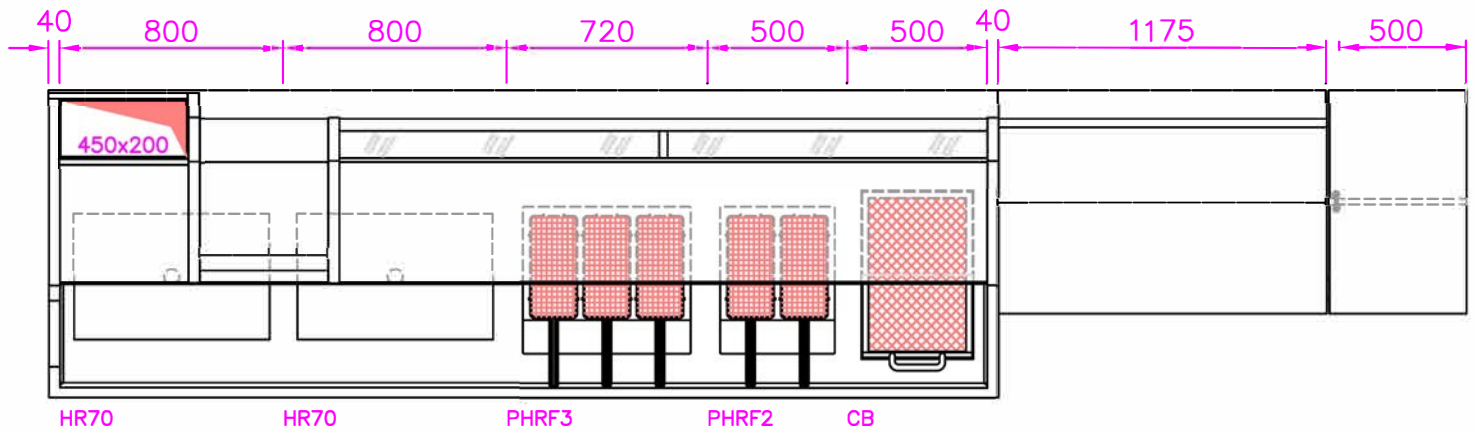

Counter range Jubilee

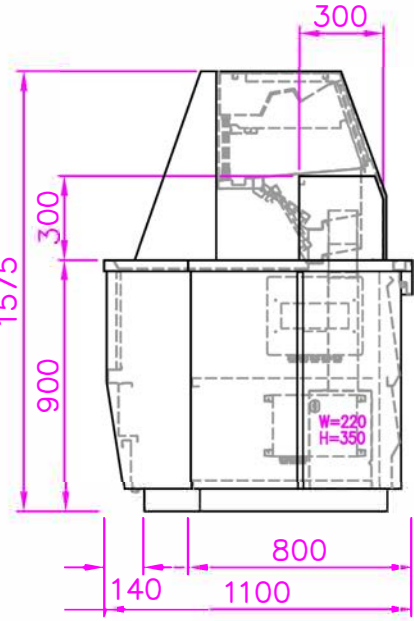

Code	Description	Voltage	P elek/kW	P Gas/kW
HR70	H.E. flat bottom 700x450mm	230V	0.05	25.00
HR70	H.E. flat bottom 700x450mm	230V	0.05	25.00
PHRF3	H.E. 3 basket chippan	230V	0.10	35.00
PHRF2	H.E. 2 basket chippan	230V	0.10	30.00
CB	Chipbox	230V	2.20	
Counter				
Flap & Door				
	Cabinets	230V	1.80	
	Range	230V	2.50	
	Total			115.00

- Duct through fryer needs to stick out 25mm instead of 40. So 1600mm total
- Downlight LED RGB
- Including Triple oil filtration system

Copyright reserved in accordance with the law	Drawing is not to scale and can be subject to change	Customer:			City:		Agent: KFE	
		Am.proj. 	Drawing no.: 2308-42163					
			Salesman:					 Middellandse Zee 9 3446 CG, Woerden The Netherlands Tel: +31 (0)348-475555 Fax: +31 (0)348-418495 www.qbtec.nl
			Tol:	Date:	Approval:			
			5mm	Drawn by: MB / KK / MB				